



# DRYING CABINET

DC4  
4 KG

## FEATURES

- Flexible construction allows hanging bars to slide easily forward for easy access to garments or down for more space
- Easy to install; the evacuating channel is connected to the ventilation system and the humid air is transported out of the room
- All electrical components are placed on the top which makes it easy to maintain
- Pull-out hanging system
- 3 temperatures; high, normal, low
- Energy efficient
- Overheat protection
- IP 24 classification.
- CE-approved

## MARKETS

Day care center, Schools, Road workers dressing room, Ships, Airports, Ski resorts, Campings, Security




Speak with a Laundry Specialist

t: 1300 222 119 e: [info@aqualogic.com.au](mailto:info@aqualogic.com.au) w: [aqualogic.com.au/contact](http://aqualogic.com.au/contact)



	DC4
LOADING CAPACITY (KG)	4
DRYING CAPACITY (G/MIN)	17*
HANGING LENGTH (M)	16
HEATING EFFECT (KW)	1,5
TOTAL EFFECT (KW)	1,535
ENERGY CONSUMPTION ECONOMY /KG (KWH)	0,5
ENERGY CONSUMPTION EXPRESS / KG (KWH)	0,6
ELECTRICAL CONNECTIONS	
STANDARD ELECTRICAL CONNECTION	220-240/50-60Hz/1 phase
FUSE (A)	10
TOTAL EFFECT (KW)	1,535
HEATING ELEMENTS (KW)	1,5
AIR CONNECTIONS	
OUTLET EXHAUST (MM)	Ø 100
OUTLET AIR FLOW (M <sup>3</sup> /H)	45
PRESSURE DROP (PA)	max. 60
SOUND LEVEL	
AIRBORNE SOUND LEVEL (DB(A))	60
SHIPPING DATA	
NET WEIGHT (KG)	61
CRATED (KG)	4
GROSS WEIGHT (KG)	65
PACKED VOLUME (M <sup>3</sup> )	0,2
DIMENSIONS	
WIDTH (MM)	595
DEPTH (MM)	619
HEIGHT (MM)	1939

\*Valid for high-spun textiles.

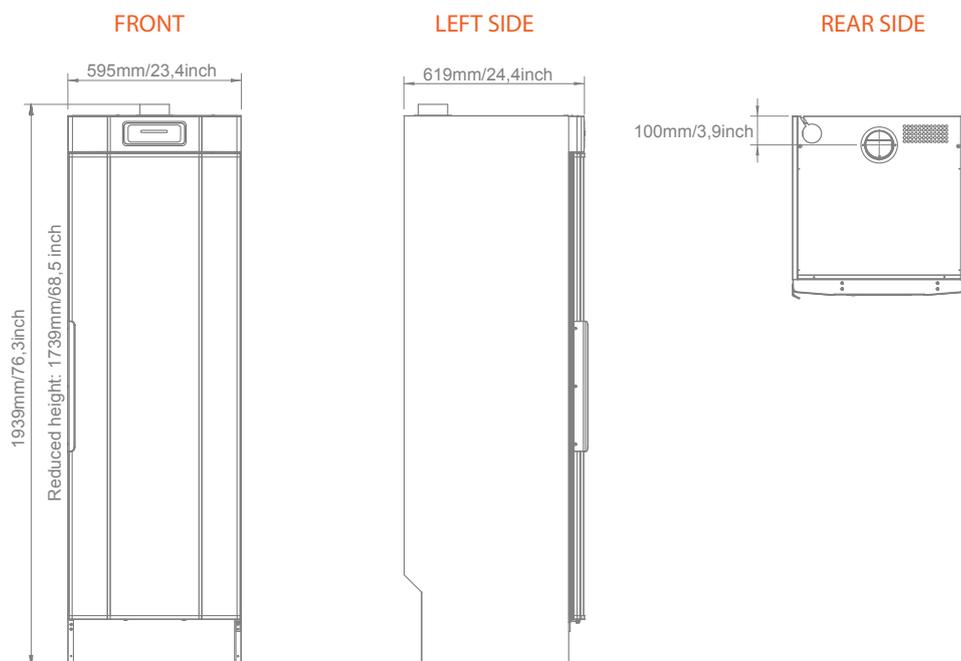

Speak with a Laundry Specialist

t: 1300 222 119

e: [info@aqualogic.com.au](mailto:info@aqualogic.com.au)

w: [aqualogic.com.au/contact](http://aqualogic.com.au/contact)

