



# INDUSTRIAL TUMBLE DRYERS WITH HEAT PUMP

IHP250

12,5KG

IHP285

14,3KG

IHP345

17,3KG

## FEATURES

- Heat pump
- Standard stainless steel drum with large diameter
- Easy to use microprocessor (Easy)
- Combination of radial and axial airflow concept:
  - Maximal heat transfer
  - Low energy consumption
- Large drain valve (Ø 76 mm)
- Large door opening for easy loading & unloading
- Self cleaning lint screen

## OPTIONS


- Stainless steel side front
- Reversing drum
- Full control programmer (Flex)
- Residual moisture control
  - Safe drying of delicate linen
  - Humidity detection in %
  - Ideal in combination with wet cleaning
  - Ideal for dry cleaners, fire departments
  - Available on Easy and Flex Control
- Coin operated version



HEAT PUMP



STANDARD  
STAINLESS STEEL  
DRUM



ENERGY  
EFFICIENT

Speak with a Laundry Specialist

t: 1300 222 119

e: [info@aqualogic.com.au](mailto:info@aqualogic.com.au)


w: [aqualogic.com.au/contact](http://aqualogic.com.au/contact)

 **Aqualogic**

	IHP250	IHP285	IHP345
INNERDRUM			
CAPACITY 20:1 (KG)	12,5	14,3	17,3
CAPACITY 25:1 (KG)	10	11,4	13,8
VOLUME (L)	250	285	345
DIAMETER (MM)	760	760	760
DRYING AVERAGE (G/MIN)	126	120	120
MOTORS			
FAN (KW)	0,30	0,30	0,30
DRIVE (KW)	0,25	0,25	0,25
HEAT PUMP			
ELECTRICAL CONNECTION	415V / 50Hz / 3Ph	415V / 50Hz / 3Ph	415V / 50Hz / 3Ph
ENERGY (KW)	2.56	2.86	3.45
PROGRAMMER			
EASY CONTROL	standard	standard	standard
FLEX CONTROL	optional	optional	optional
TRANSPORT DATA			
DIMENSIONS H X W X D (MM)	1680 x 795 x 1525	1680 x 795 x 1615	1680 x 795 x 1735
GROSS WEIGHT (KG)	385	400	400
NET WEIGHT ( KG)	350	360	375

### Energy consumption comparison

CONVENTIONAL DRYER vs. **HEAT PUMP DRYER**

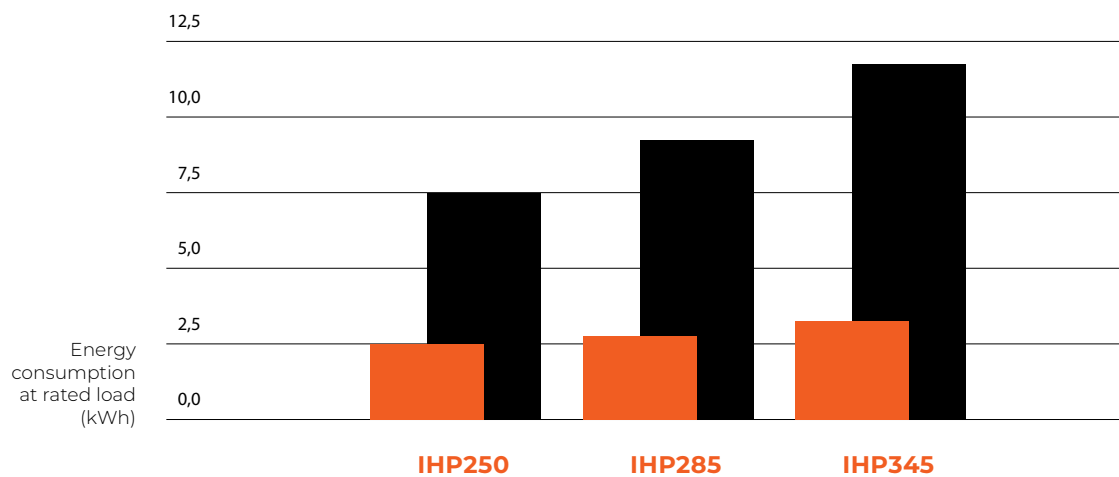

Speak with a Laundry Specialist

t: 1300 222 119

e: [info@aqualogic.com.au](mailto:info@aqualogic.com.au)

w: [aqualogic.com.au/contact](http://aqualogic.com.au/contact)

